

# 11SH10-11000/U18000-O/O 11 GHz Highpass

## ◆ Features:

- SMA Connectors
- Plated Thru Hole PC Boards
- Suspended Substrate Technology
- 1.18:1 Shape Factor




## ◆ Specifications:


Insertion Loss 1.0 dB:	11 to 18 GHz	Vibration:	10 G's, 10 Hz - 2000 Hz
VSWR:	1.5:1	Temperature:	-55° C to 85° C
Attenuation:	55 dB	Rel. Humidity:	0 - 95%
Shock:	20 G's, 1/2 Sine, 11Ms		

## ◆ Applications:

- Radar
- Military
- Interference Mitigation
- Signal Channelization

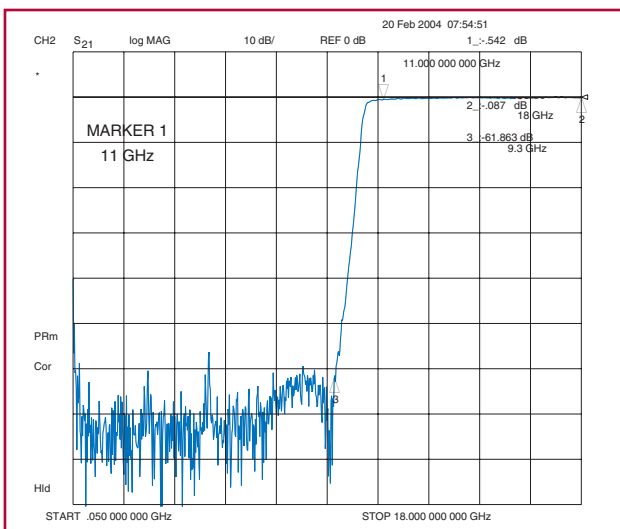

**Amplitude**

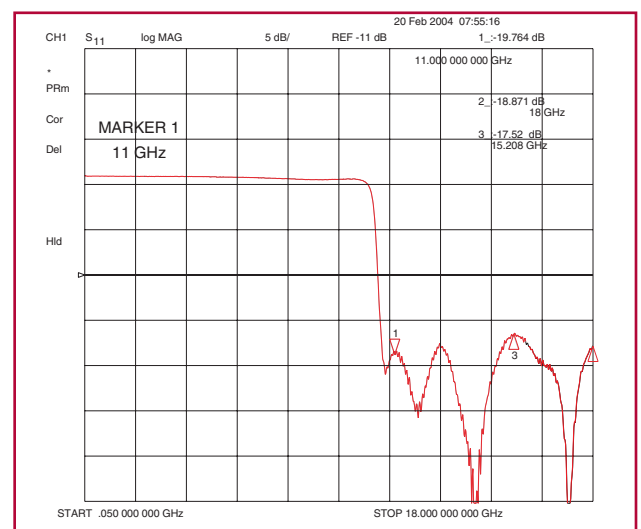

**VSWR**

**Filtering Solutions for Your Global Market**

**USA**  
 Phone: 410-749-2424  
 FAX: 410-749-5725  
 Email: sales@klmicrowave.com

**EUROPE**  
 Phone: +44-(0)-1908-547920  
 FAX: +44-(0)-1908-695284  
 Email: sales@kleurope.com

**Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)**

